

Rec'd FEB 17 MAY 2005

10/535470

IB/03/4814

NL021161  
NL031026



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

#2  
I

REC'D 18 NOV 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079849.2

PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 02079849.2  
Demande no:

Anmeldetag:  
Date of filing: 21.11.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Flexible display

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G09F/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Flexible display

EPO-DG-1  
21.11.2002  
(6A)

The invention is related to a display device assembly comprising a flexible display device being rollable around an axis, the flexible display having a front and a back side.

5

US-2002/0070910 discloses a flexible display device assembly comprising a flexible display device and a winding device to store the display in a housing. A user of the display assembly pulls the display from the housing to enjoy the content displayed on the display device. It is a problem that the display device is sensitive to indentation, scratching and tearing.

10

It is an aim of the invention to provide a display assembly in which the chance of damaging the display device is significantly reduced. To this end the display device assembly according to the invention is characterized in that one of the sides is provided with distance elements for preventing a direct contact between the front side and the back side.

15

The invention is based on the insight that damage to the conventional display is caused when the front and the back side of the display device make contact with each other. This happens during rolling-up of the display, and when the display is in the rolled-up state and is moved or transported. By preventing the front and back side to contact each other the amount of display damage is significantly reduced.

20

The dependent claims describe advantageous embodiments of the invention.

These and other objects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

25

In the drawings:

Fig. 1 shows an embodiment of the flexible display assembly according to the invention,

Figs. 2A-2D illustrate a few embodiments of hinge mechanisms,

Fig. 3 shows an embodiment of the invention wherein the distance elements are provided with outer portions,

Fig. 4 shows a side view of the embodiment of Fig. 3,

5 Fig. 5 shows another embodiment wherein a back side of the bars is provided with spacer blocks,

Fig. 6 shows a side view of the embodiment of Fig. 5, and

Fig. 7 shows an embodiment in which spacer blocks are provided with notches for receiving the display.

10 The figures are not drawn to scale. In the figures, like reference numerals generally refer to like parts.

Referring to Fig. 1, the display assembly according to the invention is shown.

15 The display device assembly 1 comprises a flexible display device 2 being rollable around an axis 5. The flexible display device 2, e.g. of the LCD type, has a front side 3 and a back side 4. Both sides 3,4 comprise flexible sheets of plastic material. Due to its flexibility the display is rollable. This property enables e.g. an easy storing of the display assembly 1 when not in use. To prevent damage to the display device 2 occurring during rolling-up and/or when the display is in the rolled-up state, either the front side 3 or the back side 4 of the display is provided with distance elements 7, 7'. In the example shown in Fig. 1 the back side 4 of the display is provided with such distance elements, 7, 7'. Alternatively, distance means for preventing a direct contact between the front side 3 and the back side 4 may also be provided in the form of a separate foil.

20 The distance elements 7,7' prevent the occurrence of a direct contact between the front side 3 and the back side 4 of the display 2. Consequently, the amount of damage is significantly reduced as compared to the conventional display.

In the example shown in Fig.1 the distance elements comprise bars 7, 7', but the invention is not limited to this particular shape. Distance elements 7, 7' having the shape of bars and being positioned so as to induce bending lines 8,8' in the flexible display device that are oriented substantially parallel to the axis 5 have the advantage that a very effective protection against damage is obtained. Further, the display may be easily rolled-up.

30 The bars 7, 7' may be positioned against each other such that rolling of the flexible display device may occur in only one direction, i.e. the direction necessary to roll it

up indicated by the arrow 9. This eases the rolling-up of the display and allows a one-hand operation. In the unrolled state the back side is rigid and firmly supports the display.

A further advantageous embodiment of the display assembly according to the invention has bars 7, 7' that comprise transparent material and are mounted on the front side  
5 3. In this case the viewer sees the display 2 through the bars, this is advantageous if positioning of the bars on the back side 4 is not possible or not preferred.

In Fig. 2A a hinge function is shown in the circle. Fig. 2B is an enlarged view of a first way of creating a hinge function between the subsequent bars: in this example the hinge function is provided by adding a layer of a flexible material 21 that is positioned  
10 between the bars 7 and the back side 4 of the display. The additional flexible layer 21 may be integrated with the flexible display itself. The flexible layer may comprise a, e.g., polyimide flexfoil containing electrically conductive patterns. The flexible layer may be fixed to the display device. The bars may contain electric or electronic components.

Fig. 2C shows an enlarged view of a second way of creating a hinge function.  
15 In this case it is the material of the bars 7 itself which is flexible. The material is provided with grooves 23 that are oriented substantially parallel to the axis. At the location of the grooves the flexible material is able to provide a hinge function. Alternatively, real hinges between the bars are also option.

Fig. 2D shows that in order to limit the deformation of the material during  
20 bending, the contact between the bars 7, 7' and the display 2 should preferably be limited to a center line 25, 25' (displayed in Fig. 2D as a single point, since the display is shown in side view) of the bars 7, 7'.

A further advantageous embodiment of the display assembly is shown in Fig.  
3. Here, a flexible display device assembly 1 has spacer elements with outer portions 31, 31'.  
25 The outer portions 31, 31' are provided with spacer blocks 33, 33' for creating a housing for storing the flexible display device when in the rolled-up state. Such a housing further protects the display against possible damage. To allow the display to be rolled-up the spacer blocks have a taper.

Fig. 4 shows a side view of the embodiment shown in Fig. 3. The spacer  
30 blocks 33, 33' in combination with the bars 7, 7' provide a protective housing for the display 2, when in the rolled-up state.

Fig. 5 shows an embodiment of the display device wherein the bars 7, 7' have a back side 51, and wherein spacer blocks 35, 35' are added to the back side 51 of the bars, resulting in a stiffer structure when the display 2 is rolled out.

Fig. 6 provides a side view of the embodiment shown in Fig. 5

Fig. 7 shows an embodiment of the display assembly according to the invention, wherein the bars 7 comprise spacer blocks 33, 33' positioned at a side opposite to the back side 51. The spacer blocks 33, 33' have a display side 73, 73'. The display side 73, 73' of the spacer blocks 33, 33' is provided with notches 71, 71' for receiving the flexible display device 2. In this way the display 2 is loosely attached to the bars 7, 7' and there is no need to fix the display to a separate flexible layer.

In summary, the invention relates to a display device assembly 1 comprising a flexible display device 2 being rollable around an axis 5, the flexible display 2 having a front side 3 and a back side 4, one of the sides being provided with distance elements 7, 7' for preventing a direct contact between the front side 3 and the back side 4. By preventing the front and back side to contact each other the amount of display damage is significantly reduced as compared to conventional roll-up displays. An advantageous embodiment comprises a display device assembly in which the distance elements are shaped in the form of bars 7, 7'.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of other elements or steps than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.

## CLAIMS:

EPO - DG 1  
21.11.2002  
(54)

1. A display device assembly comprising  
a flexible display device being rollable around an axis,  
the flexible display having a front side and a back side,  
one of the sides being provided with distance means for preventing a direct  
5 contact between the front side and the back side.

2. A flexible display device assembly according to claim 1, wherein the distance  
means comprise bars, which are positioned so as to induce bending lines in the flexible  
display device that are oriented substantially parallel to the axis.

10

3. A flexible display device assembly according to claim 2, wherein the bars  
comprise transparent material and are mounted on the front side of the flexible display.

15

4. A flexible display device assembly according to claim 2, wherein the bars are  
positioned against each other, such that rolling of the flexible display device may occur in  
only one direction.

20

5. A flexible display device assembly according to claim 2, wherein the flexible  
display device is further provided with a layer of flexible material that is positioned between  
the bars and the back side of the display.

25

6. A flexible display device assembly according to claim 2, wherein the bars are  
provided to the display in the form of a piece of material having grooves that are oriented  
substantially parallel to the axis.

7. A flexible display device assembly according to claim 2, wherein outer  
portions of the spacer elements are provided with spacer blocks for creating a housing for the  
flexible display device in the rolled-up state.

8. A flexible display device assembly according to claim 2, wherein blocks are positioned on a back side of the bars.

9. A flexible display device assembly according to claim 7, wherein each spacer  
5 block has a display side that is provided with a notch for receiving the flexible display device.


## ABSTRACT:

The invention relates to a display device assembly (1) comprising a flexible display device (2) being rollable around an axis (5), the flexible display (2) having a front side (3) and a back side (4), one of the sides (3,4) being provided with distance elements (7, 7') for preventing a direct contact between the front side (3) and the back side (4). By preventing the front and back side to contact each other the amount of display damage is significantly reduced as compared to conventional roll-up displays. An advantageous embodiment comprises a display device assembly in which the spacer elements are shaped in the form of bars (7, 7').

10 Fig.1

EPO - DG 1  
21. 11. 2002  
(54)

1/4

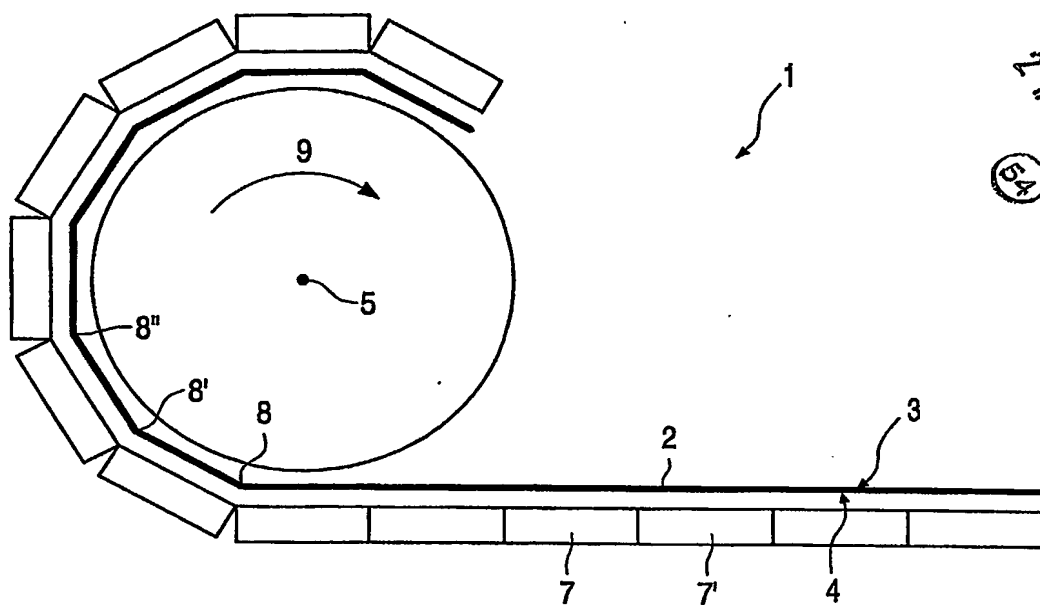

EPO-DG 1  
21. 11. 2002  
54

FIG. 1




FIG. 2A




FIG. 2B




FIG. 2C




FIG. 2D

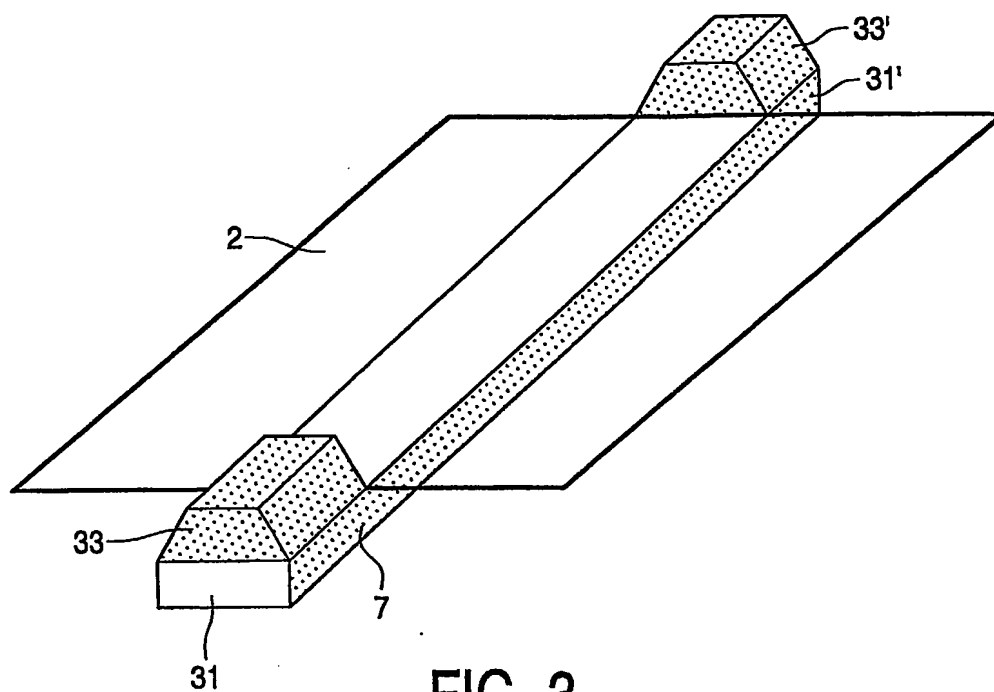


FIG. 3

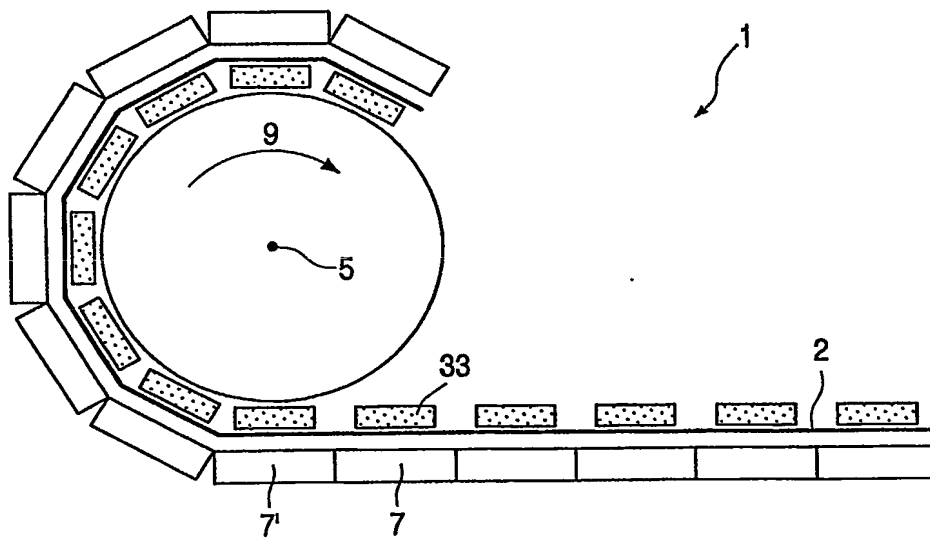


FIG. 4

3/4

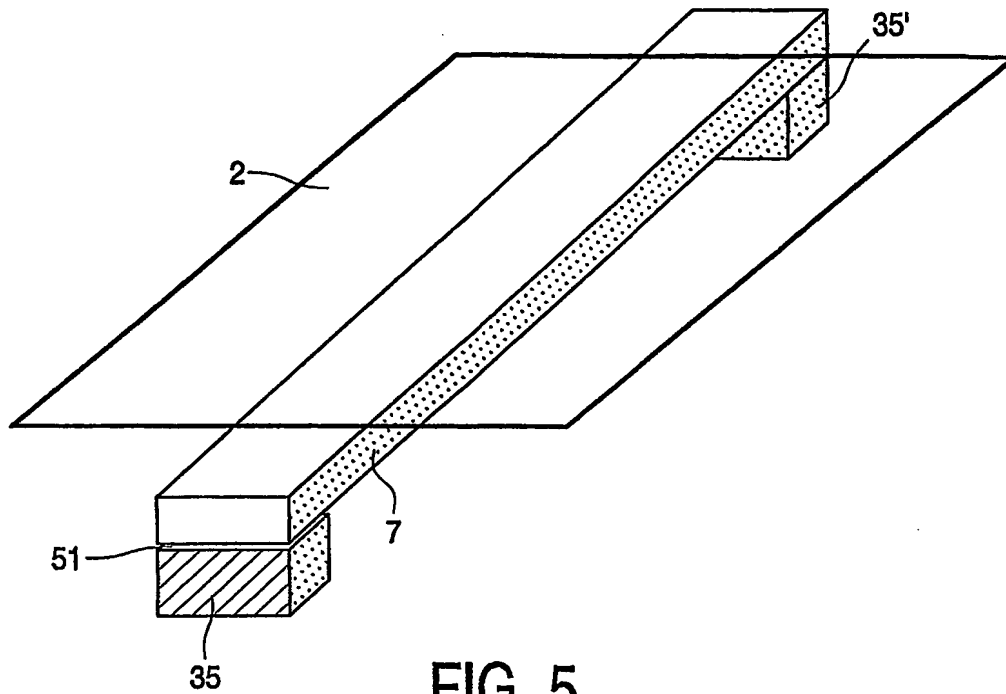


FIG. 5

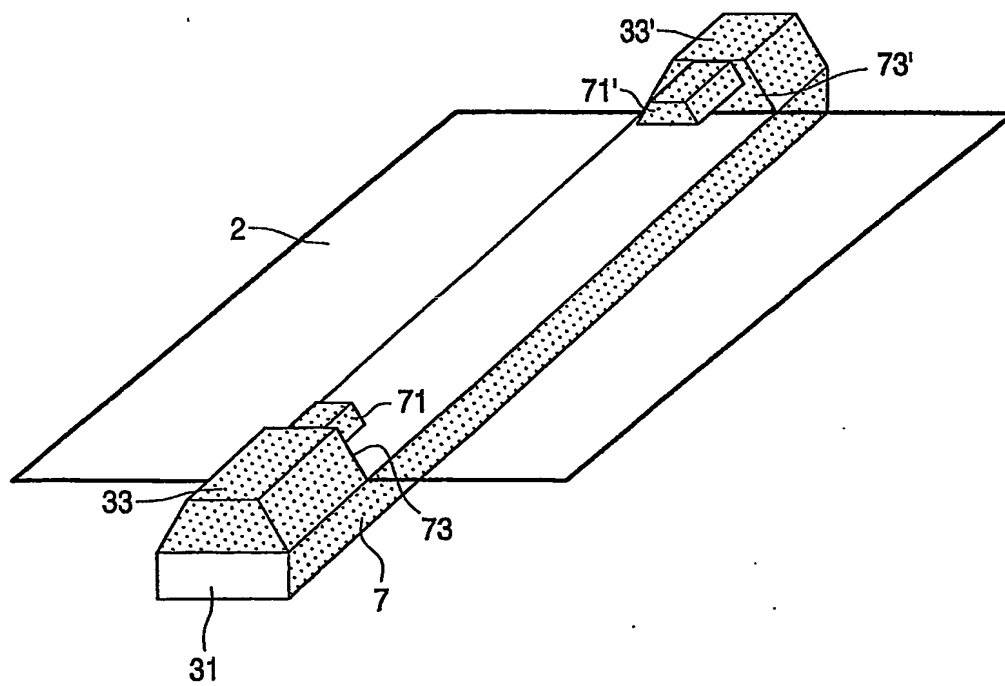


FIG. 7

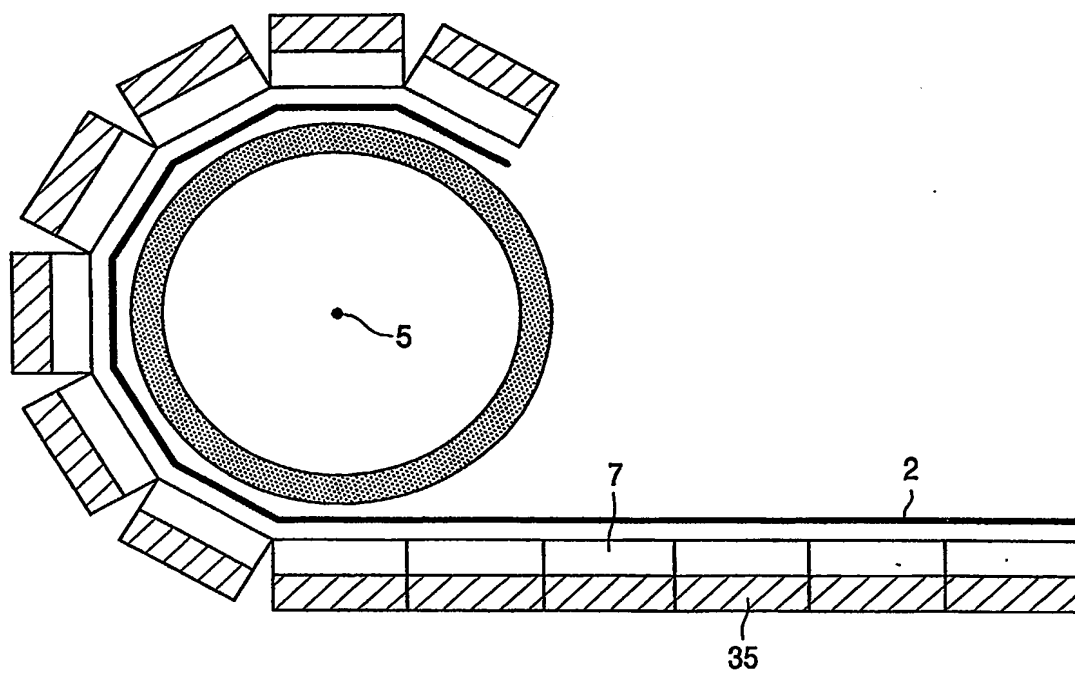


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**